

## SP6200 SWITCH PACK

### STANDARD FEATURES:

- 6 Available switches with backlight, microprocessor controlled
- 6 Available outputs
- Individual interchangeable labels for switch
- SW1 Programmable as MASTER switch (ON/OFF switch only if not used as MASTER)
- SW2 TO SW6 Programmable as ON/OFF (factory default), Momentary or Timer (9sec)

### SPECIFICATIONS:


- Input Voltage: 11 to 16 VDC
- Operating Temperature Range: -30°C to +65°C
- Maximum Current per Output Terminal: 15Amp
- Maximum Combined Current per System: 40Amp
- Supplied with a standard U-bracket
- Dimensions: Width-5 3/4", Height-1.5", Depth(Top)-3 5/8"



## SW-2 DUAL SWITCH

### STANDARD FEATURES:

- The SW-2 Dual Switch module is a lightweight, small size microprocessor controlled switch box
- Can be used in a large variety of applications in emergency vehicles
- Microprocessor controlled
- 10AMP MAX Load on each output
- Each switch can be individually setup as ON/OFF or Momentary
- Switch backlight active with Ignition
- Anti-spill protective front lexan

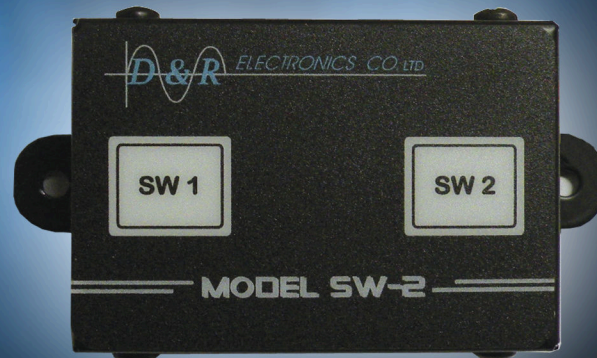

**S  
P  
6  
2  
0  
0**

**S  
W  
2**